




TD Series LED Panels are optimized for operation with Redwood System's Engine 3 power and control system. They offer high brightness, energy efficiency and long life in an ultra-thin profile. The fixtures are designed for drop-in ceilings, surface mount and suspended mount applications. They are IC rated for Direct Insulation Contact and suitable for installation in damp locations. cETLus, CE and NOM compliant.

WEIGHT	12.57 lbs. (5.7 kg)
PACKAGE SIZE	L (25 Inch) X W (25 Inch) X H (1.57 Inch)
	L 635mm x W 635mm x H 40mm

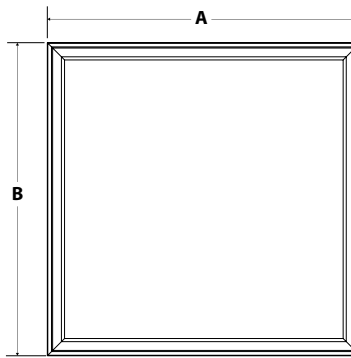

LED Panel - 2X2		
A	Americas	23.74" (603mm)
	Europe (item #'s ending with "E")	596mm
	Brazil	618mm
B	Americas	23.74" (603mm)
	Europe (item #'s ending with "E")	596mm
	Brazil	618mm

Redwood Engine 3 Ready LED Panel 2x2

ITEM #	SIZE	POWER CONSUMPTION (WATTS)	COLOR TEMPERATURE	OUTPUT LUMENS (LM)	LUMENS PER WATT (LM/W)	FINISH
TD223K-W144	2 FT X 2 FT	33	3000K	3687	111	White
TD224K-W144	2 FT X 2 FT	33	4000K	3943	119	White

EUROPE

TD223K-W144E	600mm x 600mm	33	3000K	3687	111	White
TD224K-W144E	600mm x 600mm	33	4000K	3943	119	White

BRAZIL

TD223K-W144B	625mm x 625mm	33	3000K	3687	111	White
TD224K-W144B	625mm x 625mm	33	4000K	3943	119	White

Additional sizes, custom colors/finishes available upon request.

